

# Energy Efficient Data Collection in WSN by Pattern Variation Discovery

Priyanka Sharma, Deepti Garg

Department of Computer Science, Yamuna Group of Institutions, Yamuna Nagar, India

**Abstract:** The WSN is made of "nodes" means a few to several hundreds or even thousands, where each node is connected to one (or sometimes several) sensors. Each that sensor network node has normally numerous parts: a radio transceiver with an internal antenna or relation to an external antenna, a microcontroller, an electronic circuit for interfacing with the sensors and an energy basis, in general a battery or an embedded form of energy harvesting. A sensor node might differ in size from that of a creation down to the size of a grain of dust, although functioning "motes" of genuine microscopic dimensions have yet to be formed. Cross-layer is becoming a significant studying area for wireless communications. Conventional layered technique cannot share different information among dissimilar layers, which leads to each layer not having complete information. The Ad hoc On-Demand Distance Vector (AODV) protocol is one of the most popular reactive routing protocols. It is based on demand routing protocol. This protocol enables active, self-starting, multi hop routing among the mobile nodes in the mobile ad hoc networks. Detection of irregularities is tightly interrelated to modelling of sensor data. Therefore, we suggest detecting irregular single-attribute sensor data with respect to time or space by building models.

**General Terms:** Shoebox, motes, medical applications, clusters, anomalies, power consumption

**Keywords:** Characteristics of WSN, Platforms, Data Mining, Anomalies Detection

## I. INTRODUCTION

A wireless sensor network (WSN) of spatially distributed independent sensors to examine physical or environmental environment, such as temperature, sound, pressure, etc. and to cooperatively surpass their data through the network to a main position. The more modern networks are bi-directional, also enabling control of sensor activity [1]. A sensor node might vary in size from that of a shoebox down to the size of a grain of dust, though execution "motes" of genuine microscopic dimensions have yet to be created. The cost of sensor nodes is similarly variable, varying from a few to hundreds of dollars, depending on the complication of the individual sensor nodes. Size and cost restrictions on sensor nodes result in corresponding constraints on resources such as energy, memory, computational speed and exchanges bandwidth. The topology of the WSNs can vary from a simple star network to an advanced multi-hop wireless mesh network [2].

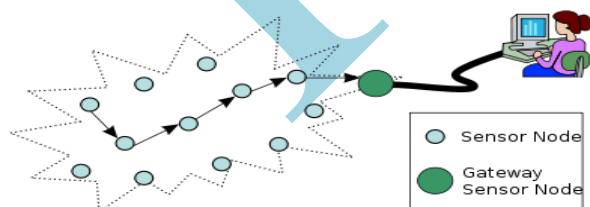


Figure 1.1: Architecture of wireless sensor network

## Applications

**Area monitoring:** Area monitoring is a ordinary application of WSNs. In area monitoring, the WSN is deployed over a section where several phenomenon is to be monitored. A military example is the uses of sensors detect

enemy intrusion; a national example is the geo-fencing of gas or oil pipelines. Area monitoring is most significant part.

**Health care monitoring:** The medical applications can be of two types: outer placed and implanted. Wearable devices are used on the body surface of a human or just at close nearness of the user. The medical devices implantable are those that are inserted inside human body [3].

## Characteristics of WSN

The main characteristics of a WSN include:

- Power utilization constraints for nodes using batteries or power harvesting
- Ability to cope with node failures
- Mobility of nodes
- Communication failures
- Scalability to huge scale of deployment
- to withstand Ability harsh environmental conditions
- Ease of use
- Cross-layer design
- Heterogeneity of nodes

## Platforms

### Hardware

One major challenge in a WSN is to produce small cost and tiny sensor nodes. There are an increasing number of small companies producing WSN hardware and the commercial situation can be collated to home computing in the 1970s. Many of the nodes are still in the research and development phase, particularly their software. Also intrinsic to sensor network adoption is the use of very low power methods for data acquisition.

### Software

Energy is the deficient source of WSN nodes, and it determines the lifetime of WSNs. WSNs are meant to be deployed in large numbers in diverse environments,

including remote and hostile regions, where ad hoc communications are a key component[5].

**Data Mining** :Data mining (the analysis step of the "Knowledge Discovery in Databases" process, or KDD), an interdisciplinary inside field of computer science, is the computational process of discovering patterns in large data sets involving methods at the connection of artificial intelligence, machine learning, statistics, and database systems. There all data mining task is the automatic or semi-automatic analysis of large quantities of data to extort previously unknown interesting patterns such as groups of data records (cluster analysis), abnormal records (abnormality detection) and dependencies (involvement rule mining). This usually involves using database techniques such as spatial indices. These formats can then be seen as a type of summary of the input data, and may be used in advance analysis or, for example, in machine learning and projecting analytics. For example, the data mining step might organize multiple groups in the data, which can then be used to achieve more accurate prediction results by a decision support system. Neither the data grouping, data preparation, nor result interpretation and reporting are part of the data mining step, but do link to the overall KDD process as additional steps [6].

**Process:** The Knowledge Discovery in Databases (KDD) process is in general defined with the stages:

- (1) Selection
- (2) Pre-processing
- (3) Transformation
- (4) Data Mining
- (5) Interpretation/estimation

It exists, however, in numerous variations on this theme, such as the Cross Industry regular Process for Data Mining (CRISP-DM) which defines six stages:

- (1) Business Understanding
- (2) Data Understanding
- (3) Data Preparation
- (4) Modeling
- (5) Estimate
- (6) Deployment

Or a simplified procedure such as (1) pre-processing, (2) data mining, and (3) results validation.

**Anomalies Detection:** ADS detect any observed activities that deviate from the normal behaviour during operation. It does not require any past knowledge of abnormal behaviour. It constructs a model of normal features from an observed system and determines a baseline of the standard behaviour from the model. Using the model constructed, it can notice novel anomalies by observing any change in the present system behaviour. A system will be flagged as abnormal if current noticed behaviours deviate from the normal profile based on acceptable threshold value set [7].

## II. LITERATURE SURVEY

The research work performed in this area by different researchers is presented as follows:

**Miao Zhao et al. [1]** suggested that current study reveals that great benefit can be achieved for data gathering in wireless sensor networks by employing mobile collectors that collect data via short-range communications. To chase

maximum energy saving at sensor nodes, intuitively, a mobile collector should navigate the transmission range of each sensor in the field such that every data packet can be straight transmitted to the mobile collector without any relay. However, this approach may lead to significantly improved data assembly latency due to the low moving velocity of the mobile collector. Fortunately, it is find out that data gathering latency can be efficiently shortened by performing proper local aggregation via multi hop transmissions and then substitutes the aggregated data to the mobile collector. In such a scheme, the number of local transmission hops should not be randomly large as it may increase the energy expenditure on packet relays, which would adversely affect the overall competence of mobile data gathering. Based on these observations, in this paper, we study the trade-off involving energy saving and data gathering latency in mobile data gathering by exploring a balance between the relay hop count of local data aggregation and the poignant tour length of the mobile collector. Author first suggest a polling-based mobile gathering technique and formulate it into an optimization problem, named bounded relay hop mobile data gathering (BRH-MDG). Distinctively, a subset of sensors will be chosen as polling points that buffer locally aggregated data and upload the data to the mobile collector when it comes. In the meanwhile, when sensors are affiliated with these polling points, it is certain that any packet relay is consisting of within a given number of hops. We then give two efficient algorithms for choosing polling points among sensors. The effectiveness of our approach is validated through widespread simulations.

**Laxmi Choudhary et al. [2]** suggested that With the fast development of computer and information technology in the last many years, an substantial amount of data in science and engineering has been and will continuously be generated in massive scale, either being stored in massive storage devices or curving into and out of the system in the form of data streams. Moreover, such data has been made widely available, e.g., via the Internet. Such tremendous amount of data, in the order of tera in peta-bytes, has fundamentally altered science and engineering, transforming many disciplines from data-poor to progressively data-rich and calling for new, methods which are data-intensive to conduct research in science and engineering. In this paper, author discuss the research challenges in science and engineering, from the data mining perspective, with a stress on the following reasons: (1) information network analysis, (2) discovery, usage, and understanding of patterns and knowledge, (3) rivulet data mining, (4) RFID data ,mining moving object data , and also data from sensor networks(5) multimedia data mining and spatiotemporal (6) Web , mining text, and other unstructured data, (7) data cube-oriented multidimensional online mining that are logical (8) visual data mining, and (9) data mining by integration of complicated scientific and engineering domain knowledge.

**Khushboo Sharma et al. [3]** suggested that Advances in wireless technologies have direct to the development of sensor nodes that are competent of sensing, processing, and transmitting. They collect large amounts of sensor data in a

vastly decentralized manner. Classification is an significant task in data mining. In this paper a Nearest Neighbour organization technique is used to classify the Wireless Sensor Network data. Experimental examination yields a significant output in terms of the correctly classified success rate being 92.3%.

**Rouhollah Maghsoudi et al. [4]** suggested that Data mining knowledge in response to technological advances in diverse Ryman, foot arena is built there. Data Mining face a diverse situation that the data size is large and we want to build a small model and not too problematical and yet the data as well as describe. Requirement to use data analysis to reduce the amount and the vast volume of information. One important and practical complications in the world of machine intelligence and is robotics robots routing. Robot router has barrier discovery and how to deal with the decision with obstacle. For routing, algorithms counting probabilistic methods (filtering particulate), evolutionary algorithms like as genetic, ants social and optimization unit mass, neural methods - Fuzzy, inequality of matrix method based on gradient methods collective sensor information, etc. There are data exclusion methods in the years 2010-2008 as a technique for routing and a absolute robot has been used and still is in progress. Summary of the methods in the paper mentioned in diverse articles since 2000 has so far. Though many data mining methods include, but mentioned in this article with precise literature data mining will deal with the routing problem.

**Neelamadhab Padhy et al. [5]** suggested that In this paper author have focused a variety of techniques, approaches and various areas of the research which are helpful and marked as the important field of data mining Technologies. As it is clear that many MNC's and large organizations are operated in different places of the different countries. Each place of operation may produce huge volumes of data. Corporate decision makers require access from all such sources and take planned decisions .The data warehouse is used in the significant business value by improving the effectiveness of managerial decision-making. In a uncertain and highly competitive business environment, the value of strategic information systems such as these are easily renowned however in today's business environment, efficiency or pace is not the only key for competitiveness. This type of vast amount of data's is available in the form of tera- to petabytes which has radically changed in the areas of science and engineering. To analyse, manage and make a decision of such type of vast amount of data we need techniques called the data mining which will transforming in many fields. This paper imparts extra number of applications of the data mining and also o focuses scope of the data mining which will helpful in the further research.

**R.Sivaranjini et al. [6]** Nowadays Wireless sensor networks playing vital role in all area. Which is used to intellect the environmental monitoring, Temperature, Soil erosion etc. Low data delivery efficiency and high energy utilization are the inherent problems in Wireless Sensor Networks. Finding accurate data is more difficult and also it will leads to more exclusive to collect all sensor readings. Clustering and prediction techniques, which exploit spatial

and temporal connection among the sensor data, provide opportunities for reducing the energy utilization of continuous sensor data collection and to achieve network energy competence and stability. So as we propose Dynamic scheme for energy utilization and data collection in wireless sensor networks by integrating adaptively enabling/disabling prediction scheme, sleep/awake method with vibrant scheme. Framework defined is clustering based. A cluster head represents all sensor nodes within the section and collects data values from them. framework is general enough to incorporate many advanced features and author show how sleep/awake scheduling can be useful, which takes our framework approach to designing a practical dynamic algorithm for data aggregation, it ignore the need for rampant node-to-node propagation of aggregates, but rather it uses faster and more proficient cluster-to-cluster propagation. To the best of information, this is the first work adaptively enabling/disabling forecast scheme with dynamic scheme for clustering-based continuous data collection in sensor networks. When a cluster node crash because of energy reduction we need to choose alternative cluster head for that particular section. It will help to achieve less energy consumption. Projected models, analysis, and framework are validated via simulation and evaluation with Static Cluster method in order to achieve better energy efficiency.

**M. Mehdi Afsar et al. [7]** Energy preservation is one of the most important challenges in wireless sensor networks. In most applications, sensor networks contains of hundreds or thousands nodes that are dispersed in a broad field. Hierarchical architectures and data aggregation methods are gradually more gaining more popularity in such large-scale networks. In this paper, author suggests a novel adaptive Energy-Efficient Multi-layered Architecture (EEMA) protocol for large-scale sensor networks, wherein both hierarchical construction and data aggregation are efficiently utilized. EEMA divides the network into some layers as well as every layer into some clusters, where the data are gathered in the first layer and are iteratively aggregated in upper layers to reach the base station. Many criteria are sensibly employed to elect head nodes, including the residual power, centrality, and proximity to bottom-layer heads. The routing delay is mathematically analyzed. Performance valuation is performed via a simulation which confirms the effectiveness of the projected EEMA protocol in terms of the network lifetime and reduced routing delay.

**Er. Vickey Sharma et al. [8]** WSN contains of spatially distributed autonomous sensors used to monitor physical or environmental conditions, such as sound, pressure, temperature etc. and to generally pass their data through the network to a primary location. The advancement of wireless sensor networks was aggravated by military applications such as battlefield surveillance; now such networks are used in many industrial applications and consumer applications, such as machine health observing, industrial process noticing and control, and so on. Sensor nodes are competent of sensing and transmitting. They collect huge amount of data in a vastly decentralized manner. The data collected contain all the information about the region. But sometimes

users need only the precise information and for them rest of the information is treated as irrelevant. So here filter out that inappropriate data for the benefit of the users.

### III. PROPOSED WORK

#### Problem Formulation

We want to discover the irregular allotment pattern among multiple sensory attributes along time. Then, for each time point, we can place the values of a group of sensory attributes at a series of sensor nodes into a matrix, which defines a distribution status. The problem then becomes to notice the irregular matrix among a set of matrices. An irregular matrix represents that, at the equivalent time point, the distribution pattern of all the sensory attributes on all the nodes are irregular. Detection of irregularities is tightly interrelated to modeling of sensor data. Therefore, we propose to detect asymmetrical single-attribute sensor data with respect to time or space by building models.

#### Proposed Work

A new approach named proposed AODV (pattern variation discovery) is used to solve this problem. Our approach works in the following four steps:

1. Selection of a reference frame. This frame consists of the directions along which we want to look for irregularities between multiple sensory attributes. An analyst can explicitly indicate the reference frame. It is also possible to discover the reference frame that results in a lot of irregularities.
2. Definition of normal patterns. This definition can be models of multiple sensory attributes or constraints among multiple attributes.
3. Detection of irregularity. Whenever a normal pattern is broken at some point along the reference frame, irregularity appears. That is, the pattern variation happens.

### IV. RESULTS AND ANALYSIS

#### Evaluation of Simulation

In the scenario we take network of 30 Nodes & Detect or Filter out the Anomalies or Irregularities when we look at the animation of the simulation, applying NAM. The output can be analyzed by observing the screenshots of the NS2 network simulator

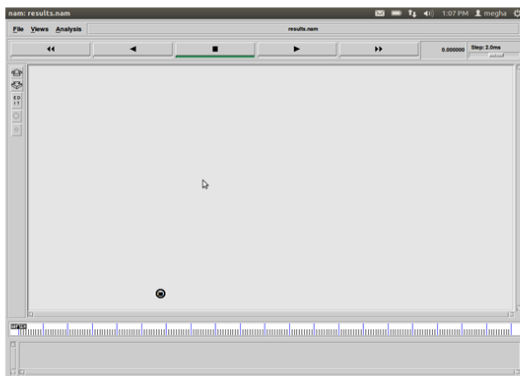


Figure 4.1 Creation of nodes

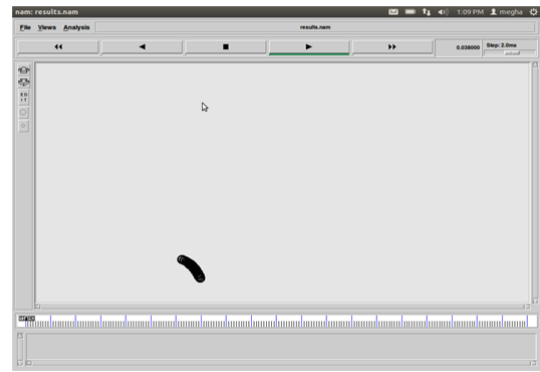


Figure 4.2

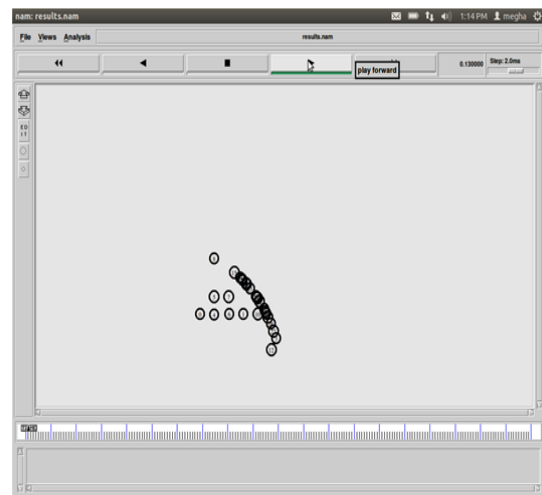


Figure 4.3

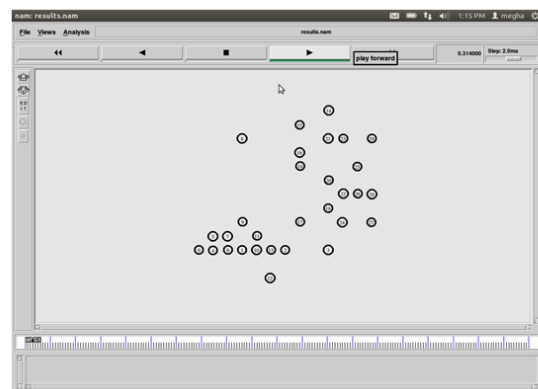


Figure 4.4 Network Model of 30 nodes

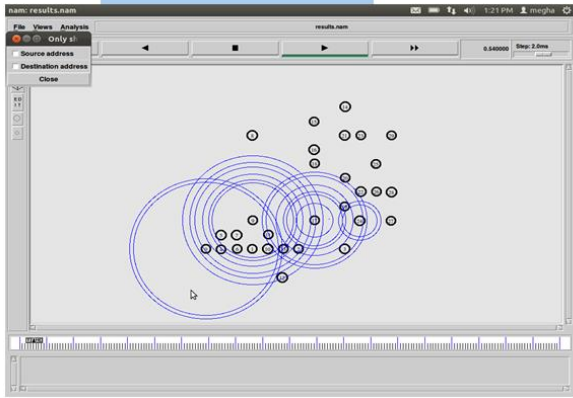


Figure 4.5 Zones between the nodes

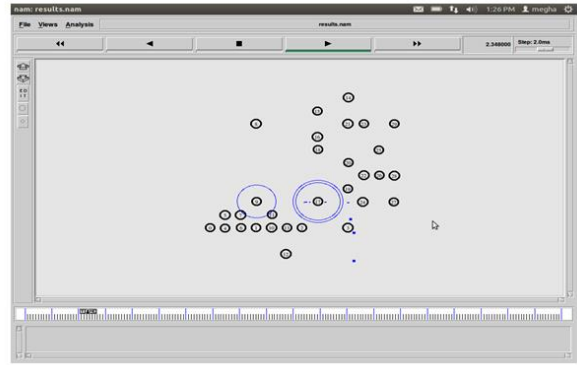


Figure 4.9 Packet drop between the nodes

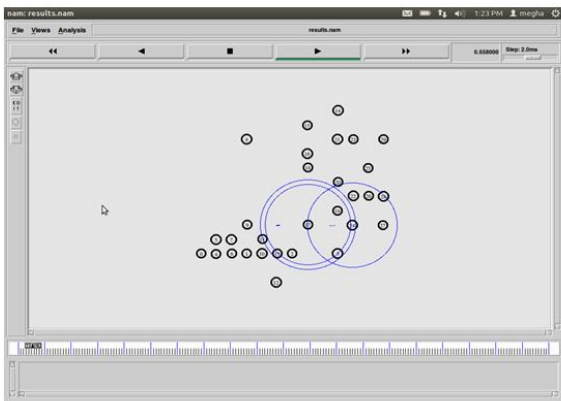


Figure 4.6 Transmission between the nodes

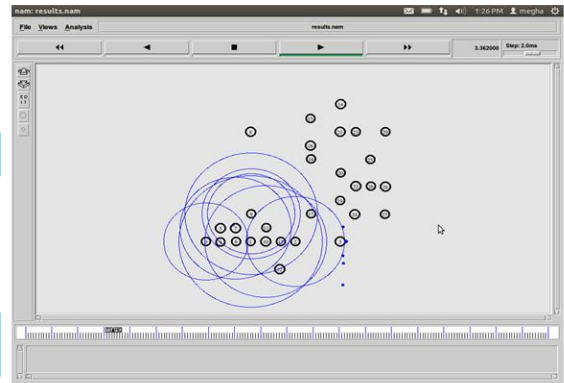


Figure 4.10

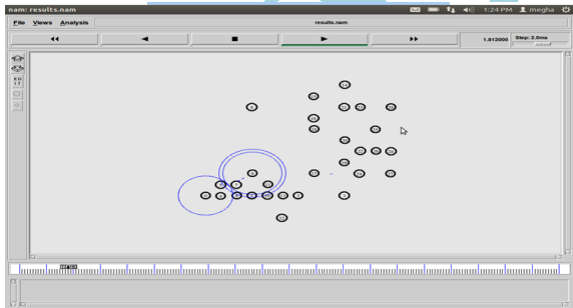


Figure 4.7 Nodes showing Transmission

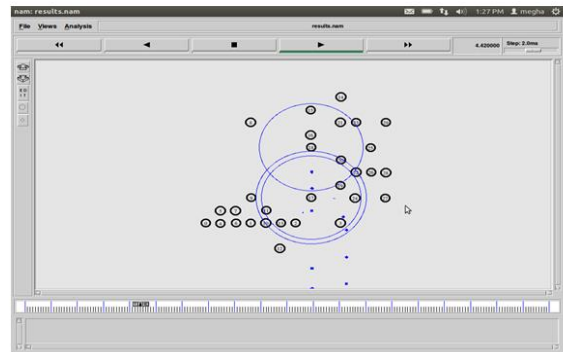


Figure 4.11

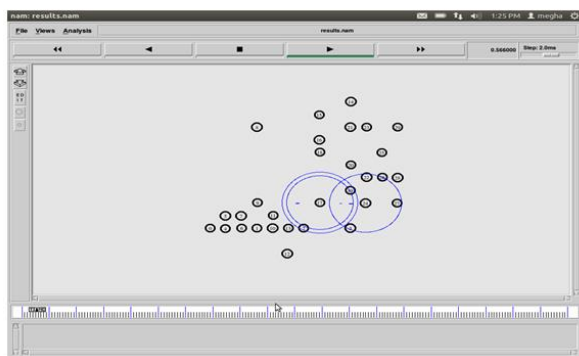


Figure 4.8

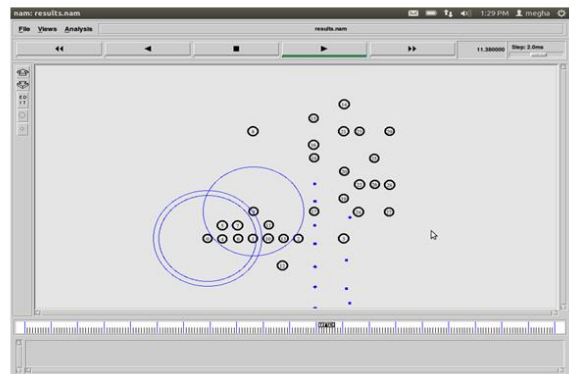


Figure 4.12

We have taken total of thirty nodes in our simulation valuation process as shown in the figure 4.1 to figure 4.12 above. In the above figures it is being observed that in the starting of simulation process we have network with Thirty nodes, packets are transmitted from one node to other node, As soon the packets with anomalies or irregularities are detected, They are dropped in the form of Droppings. As the Anomalies are detected, Energy consumption by network is less which increases the efficiency of Wireless Sensor Networks.

**Parameters analysed in thirty nodes network with two different scenarios with respect to time:**

1. Packets with Anomalies
2. Packets without Anomalies
3. Energy Consumption with Anomalies
4. Energy Consumption without Anomalies


**Graphical Results:**

**1. Scenario One (For simulation time=25 sec):**

**1: Packets with & without Anomalies**

Table 4.1: Table showing values of packets with and without anomalies for simulation time=25 sec

Simulation Time	Packets with Anomalies	Packets without anomalies
5	600	10
10	1500	200
15	1800	400
20	2050	600
25	2300	900

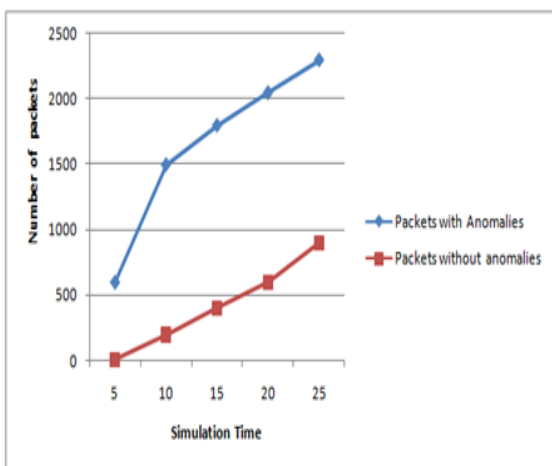


**Figure 4.13: Graph showing packets with anomalies and without anomalies for simulation time=25 sec**

**2: Energy Consumption with & without Anomalies**

Table 4.2: Table showing values of energy with and without anomalies for simulation time=25 sec

Simulation Time	Energy with anomalies	Energy without anomalies
5	125	25
10	260	90
15	340	160
20	440	240
25	530	310

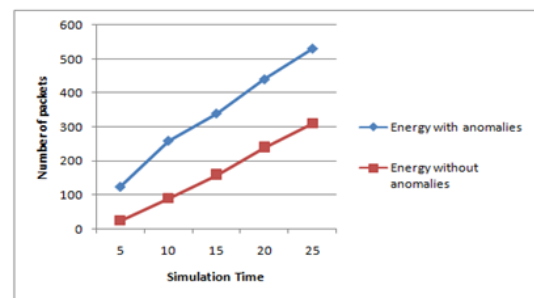


**Figure 4.14: Graph showing energy with anomalies and without anomalies for simulation time=25 sec**

**2. Scenario Two (For simulation time =40):**

**1: Packets with & without Anomalies**

Table 4.3: Table showing values of packets with and without anomalies for simulation time=40 sec

Simulation Time	Packets with anomalies	Packets without anomalies
10	1500	200
20	2000	600
30	2600	1150
40	3100	1600

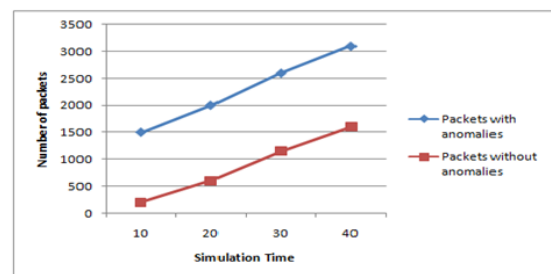

**Figure 4.15: Graph showing packets with anomalies and without anomalies for simulation time=40 sec**

**2: Energy Consumption with & without Anomalies**

Table 5.4: Table showing values of packets with and without anomalies for simulation time=40 sec

Simulation Time	Energy with anomalies	Energy without anomalies
10	240	90
20	440	245
30	650	360
40	850	510

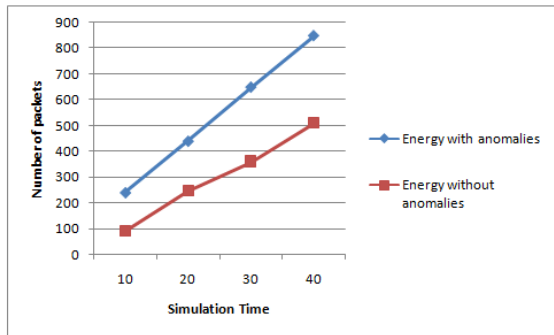


Figure 4.16: Graph showing energy with anomalies and without anomalies for simulation time=40 sec

## V. CONCLUSION AND FUTURE SCOPE

Sensor nodes are competent of sensing and transmitting. They collect huge amount of data in a highly decentralized mode. The data collected consists all the information about the region. But sometimes users need only the specific information and for users remaining information is handled as immaterial. So, here we filter out that irrelevant data for the benefit of the users. In future, same can be used to extract the desired information from the set of large information. AODV is being compared the proposed AODV. Proposed AODV has better performance as efficiency of the system is being increased by filtering out the unnecessary data. I compared proposed aodv with existing aodv protocol at different simulation time after that the result shows that the packets with anomalies are being filtered out using the data mining concept. And the proposed aodv is more energy efficient than the existing aodv. For getting the best results

I have added the filtering concept. Future aspects for the proposed system are bright. We can use the concept of clustering for filtering out the data with anomalies. Other mining concepts are also available.

## REFERENCES

- [1]. Miao Zhao and Yuanyuan Yang, "Bounded Relay Hop Mobile Data Gathering in Wireless Sensor Networks" IEEE TRANSACTIONS ON COMPUTERS, VOL. 61, NO. 2, FEBRUARY 2012.
- [2]. Laxmi Choudhary and Banasthali, "CHALLENGES FOR DATA MINING", IJREAS Volume 2, Issue 2 (February 2012) ISSN: 2249-3905.
- [3]. JANG-PING SHEU and KUN-YING HSIEH, "Design and Implementation of Mobile Robot for Nodes Replacement in Wireless Sensor Networks", JOURNAL OF INFORMATION SCIENCE AND ENGINEERING 24, 393-410 (2008).
- [4]. Rouhollah Maghsoudi and Yaghub Heidari, "Surveying Robot Routing Algorithms with Data Mining Approach" The Journal of Mathematics and Computer Science Vol .2 No.2 (2011) 284-294.
- [5]. R. Shah and S. Roy, "Data MULEs: Modeling a Three-Tier Architecture for Sparse Sensor Networks," Elsevier AdHoc Networks J., vol. 1, pp. 215-233, Sept. 2003
- [6]. R.Sivaranjini and E.Dinesh,"An Adaptive scheme for energy consumption and data collection in Wireless Sensor Networks", Volume 2 Issue 3 | March. 2013, PP.50-55
- [7]. M. Mehdi Afsar, "Effective Data Aggregation Scheme For Large-scale Wireless Sensor Networks", 2014
- [8]. Vickey Sharma,"An Efficient Data Collection Approach in Wireless Sensor Networks ", Volume 5, Issue 7, July 2015